
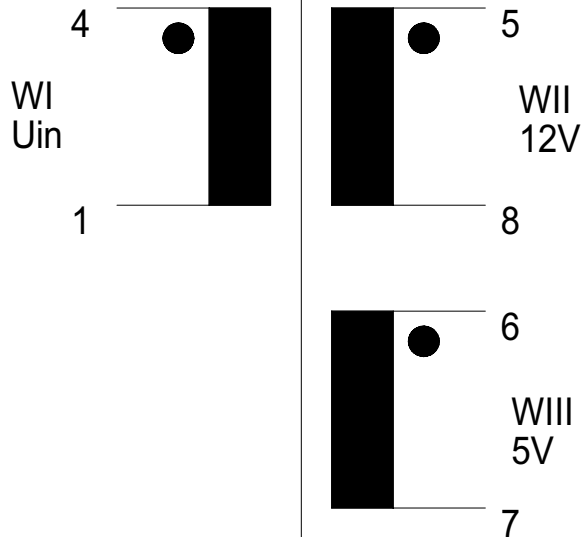


# Technical Data Sheet

Customer:  
**Kaschke Göttingen**

Part designation:  
**SP-E 16/5**

Customer part no.:  
**SKNY264-5-12-5**

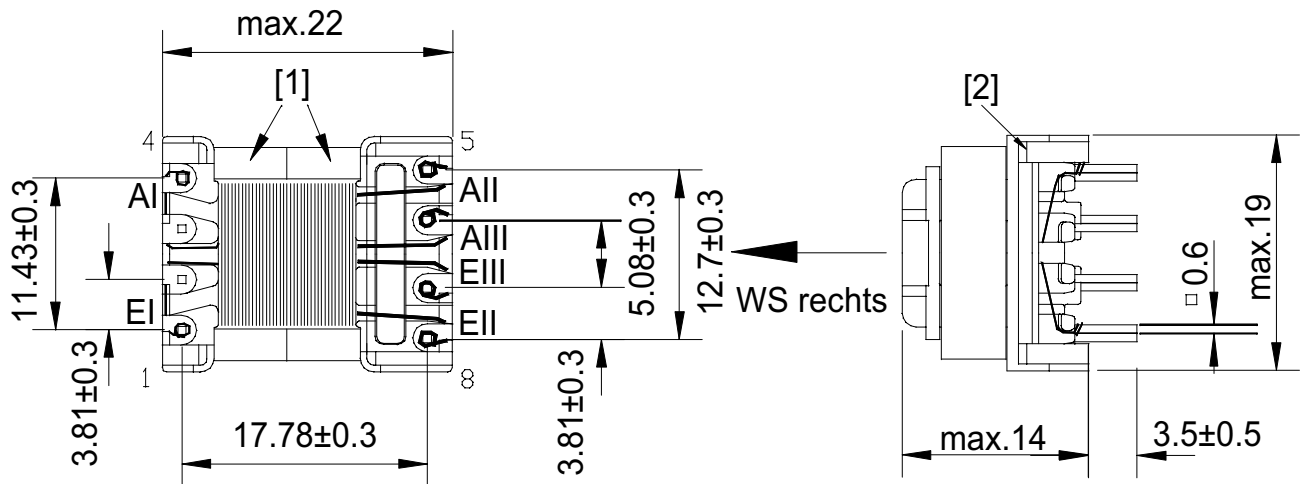

Core / material / air gap / AL	<b>E16/5 K2006 or äqiv. m.L.0,15</b>	
Nominal inductance	<b>LI= 2,55mH ±15%</b>	
maximum transmissible power	<b>5W</b>	
Working frequency	<b>132 kHz</b>	
Transformation ratio	<b>21,16:2,33:1</b>	
dielectric strength (50Hz/2s)	<b>4,0kV (WI-WII/WIII)</b>	
Nominal Current		
Design in comp. with standard	<b>EN60950 / EN61558</b>	
Working / storage temperature	<b>-25°C- +115°C</b>	<b>-25°C- +85°C</b>
Miscellaneous	<b>F (DIN 40040)</b>	

Remarks : **Samples for testing.**

Measuring device of L: **W&K 3260A**

Measuring conditions of L: **50mV/10kHz/22,6°C**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person:

**Uwe Dickhut**

Date:

..

Design regulation no:

**093.203**

Index:

**00**

**PLEASE GIVE US YOUR WRITTEN RELEASE**

Date

Signature