

3 TERMINAL 1.5A POSITIVE VOLTAGE REGULATORS


DESCRIPTION

The X7805 series of three-terminal positive regulators are available in TO-220 package and with several fixed output voltage, making them useful in a wide range of application. Each type employs internal current limiting, thermal shut-down and safe area protection, making it essentially indestructible. If adequate heat sinking is provided, they can deliver over 1.5A output current. Although designed as fixed voltage regulators, these devices can be used with external components to obtain adjustable voltage and currents.

FEATURES

- *Output current up to 1.5A
- *5V;6V;8V;9V;10V;12V;15V;18V;24V output voltage available
- *Thermal overload protection
- *Short circuit protection
- *Output transistor SOA protection

BLOCK DIAGRAM

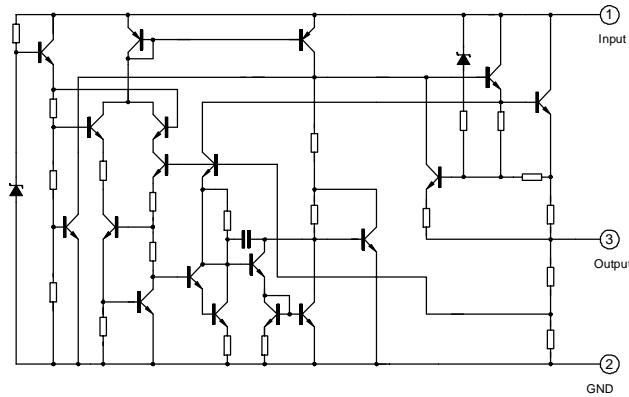

ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ\text{C}$)

Characteristic	Symbol	Value	Unit
Input voltage (for $V_o=5\text{V}$ to 18V) (for $V_o=24\text{V}$)	V_i	35 40	V V
Thermal resistance junction-air	$R_{\theta JA}$	65	$^\circ\text{C}/\text{W}$
Thermal resistance junction-cases	$R_{\theta JC}$	5	$^\circ\text{C}/\text{W}$
Operating Temperature	T_{opr}	0~ +125	$^\circ\text{C}$
Storage Temperature	T_{stg}	-65 ~ +150	$^\circ\text{C}$

X78XX**LINEAR INTEGRATED CIRCUIT****X7805 ELECTRICAL CHARACTERISTICS**(Refer to test circuits, $0 < T_j < 125^\circ\text{C}$, $I_o = 500\text{mA}$, $V_i = 10\text{V}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	V_o	$T_j=25^\circ\text{C}$	4.8	5.0	5.2	V
		$5.0\text{mA} < I_o < 1.0\text{A}, P_o < 15\text{W}$ $V_i = 7.5\text{V}$ to 20V	4.75	5.00	5.25	V
Line regulation	ΔV_o	$T_j=25^\circ\text{C}, V_i = 7.5\text{V}$ to 25V		4.0	100	mV
		$T_j=25^\circ\text{C}, V_i = 8\text{V}$ to 12V		1.6	50	mV
Load regulation	ΔV_o	$T_j=25^\circ\text{C}, I_o = 5.0\text{mA}$ to 1.5A		9	100	mV
		$T_j=25^\circ\text{C}, I_o = 250\text{mA}$ to 750mA		4	50	mV
Quiescent current	I_Q	$T_j=25^\circ\text{C}$		5.0	8	mA
Quiescent current change	ΔI_Q	$I_o = 5\text{mA}$ to 1.0A		0.03	0.5	mA
		$V_i = 8\text{V}$ to 25V		0.3	0.8	mA
Output voltage drift	$\Delta V_o/\Delta T$	$I_o = 5\text{mA}$		-0.8		$\text{mV}/^\circ\text{C}$
Output noise voltage	V_N	$f = 10\text{Hz}$ to $100\text{kHz}, T_a = 25^\circ\text{C}$		42		μV
Ripple rejection	RR	$f = 120\text{Hz}, V_i = 8\text{V}$ to 18V	62	73		dB
Dropout voltage	V_o	$I_o = 1.0\text{A}, T_j = 25^\circ\text{C}$		2		V
Output resistance	R_o	$f = 1\text{kHz}$		15		$\text{m}\Omega$
Short circuit current	I_{SC}	$V_i = 35\text{V}, T_a = 25^\circ\text{C}$		230		mA
peak current	I_{PK}	$T_j = 25^\circ\text{C}$		2.2		A

X7806 ELECTRICAL CHARACTERISTICS(Refer to test circuits, $0 < T_j < 125^\circ\text{C}$, $I_o = 500\text{mA}$, $V_i = 11\text{V}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	V_o	$T_j=25^\circ\text{C}$	5.75	6.00	6.25	V
		$5.0\text{mA} < I_o < 1.0\text{A}, P_o < 15\text{W}$ $V_i = 8.5\text{V}$ to 21V	5.7	6.0	6.3	V
Line regulation	ΔV_o	$T_j=25^\circ\text{C}, V_i = 8.5\text{V}$ to 25V		5	120	mV
		$T_j=25^\circ\text{C}, V_i = 9\text{V}$ to 13V		1.5	60	mV
Load regulation	ΔV_o	$T_j=25^\circ\text{C}, I_o = 5.0\text{mA}$ to 1.5A		9	130	mV
		$T_j=25^\circ\text{C}, I_o = 250\text{mA}$ to 750mA		3	60	mV
Quiescent current	I_Q	$T_j=25^\circ\text{C}$		5.0	8	mA
Quiescent current change	ΔI_Q	$I_o = 5\text{mA}$ to 1.0A			0.5	mA
		$V_i = 9\text{V}$ to 25V			0.8	mA
Output voltage drift	$\Delta V_o/\Delta T$	$I_o = 5\text{mA}$		-0.8		$\text{mV}/^\circ\text{C}$
Output noise voltage	V_N	$f = 10\text{Hz}$ to $100\text{kHz}, T_a = 25^\circ\text{C}$		45		μV
Ripple rejection	RR	$f = 120\text{Hz}, V_i = 9\text{V}$ to 19V	59	75		dB
Dropout voltage	V_o	$I_o = 1.0\text{A}, T_j = 25^\circ\text{C}$		2		V
Output resistance	R_o	$f = 1\text{kHz}$		19		$\text{m}\Omega$
Short circuit current	I_{SC}	$V_i = 35\text{V}, T_a = 25^\circ\text{C}$		250		mA
peak current	I_{PK}	$T_j = 25^\circ\text{C}$		2.2		A

X78XX

2009.10.11 V1.1

X7808 ELECTRICAL CHARACTERISTICS(Refer to test circuits, $0 < T_j < 125^\circ\text{C}$, $I_o = 500\text{mA}$, $V_i = 14\text{V}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	V_o	$T_j=25^\circ\text{C}$	7.7	8.0	8.3	V
		$5.0\text{mA} < I_o < 1.0\text{A}, P_o < 15\text{W}$ $V_i=11\text{V}$ to 23V	7.6	8.0	8.4	V
Line regulation	ΔV_o	$T_j=25^\circ\text{C}, V_i=10.5\text{V}$ to 25V		5.0	160	mV
		$T_j=25^\circ\text{C}, V_i=11\text{V}$ to 17V		2.0	80	mV
Load regulation	ΔV_o	$T_j=25^\circ\text{C}, I_o=5.0\text{mA}$ to 1.5A		10	160	mV
		$T_j=25^\circ\text{C}, I_o=250\text{mA}$ to 750mA		5.0	80	mV
Quiescent current	I_Q	$T_j=25^\circ\text{C}$		5.0	8	mA
Quiescent current change	ΔI_Q	$I_o=5\text{mA}$ to 1.0A		0.05	0.5	mA
		$V_i=11\text{V}$ to 25V		0.5	1.0	mA
Output voltage drift	$\Delta V_o/\Delta T$	$I_o=5\text{mA}$		-0.8		$\text{mV}/^\circ\text{C}$
Output noise voltage	V_N	$f=10\text{Hz}$ to $100\text{kHz}, T_a=25^\circ\text{C}$		52		μV
Ripple rejection	RR	$f=120\text{Hz}, V_i=11.5\text{V}$ to 21.5V	56	73		dB
Dropout voltage	V_o	$I_o=1.0\text{A}, T_j=25^\circ\text{C}$		2		V
Output resistance	R_o	$f=1\text{kHz}$		17		$\text{m}\Omega$
Short circuit current	I_{SC}	$V_i=35\text{V}, T_a=25^\circ\text{C}$		230		mA
peak current	I_{pk}	$T_j=25^\circ\text{C}$		2.2		A

X7809 ELECTRICAL CHARACTERISTICS(Refer to test circuits, $0 < T_j < 125^\circ\text{C}$, $I_o = 500\text{mA}$, $V_i = 15\text{V}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	V_o	$T_j=25^\circ\text{C}$	8.65	9.00	9.35	V
		$5.0\text{mA} < I_o < 1.0\text{A}, P_o < 15\text{W}$ $V_i=11.5\text{V}$ to 24V	8.6	9.0	9.4	V
Line regulation	ΔV_o	$T_j=25^\circ\text{C}, V_i=11.5\text{V}$ to 25V		6	180	mV
		$T_j=25^\circ\text{C}, V_i=12\text{V}$ to 25V		2	90	mV
Load regulation	ΔV_o	$T_j=25^\circ\text{C}, I_o=5.0\text{mA}$ to 1.5A		12	180	mV
		$T_j=25^\circ\text{C}, I_o=250\text{mA}$ to 750mA		4	90	mV
Quiescent current	I_Q	$T_j=25^\circ\text{C}$		5.0	8	mA
Quiescent current change	ΔI_Q	$I_o=5\text{mA}$ to 1.0A		0.5	mA	
		$V_i=12\text{V}$ to 26V		0.8	mA	
Output voltage drift	$\Delta V_o/\Delta T$	$I_o=5\text{mA}$		-1		$\text{mV}/^\circ\text{C}$
Output noise voltage	V_N	$f=10\text{Hz}$ to $100\text{kHz}, T_a=25^\circ\text{C}$		58		μV
Ripple rejection	RR	$f=120\text{Hz}, V_i=13\text{V}$ to 23V	56	71		dB
Dropout voltage	V_o	$I_o=1.0\text{A}, T_j=25^\circ\text{C}$		2		V
Output resistance	R_o	$f=1\text{kHz}$		15		$\text{m}\Omega$
Short circuit current	I_{SC}	$V_i=35\text{V}, T_a=25^\circ\text{C}$		250		mA
peak current	I_{pk}	$T_j=25^\circ\text{C}$		2.2		A

X78XX**LINEAR INTEGRATED CIRCUIT****X7810 ELECTRICAL CHARACTERISTICS**(Refer to test circuits, $0 < T_j < 125^\circ\text{C}$, $I_o = 500\text{mA}$, $V_i = 16\text{V}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	V_o	$T_j=25^\circ\text{C}$	9.6	10	10.4	V
		$5.0\text{mA} < I_o < 1.0\text{A}, P_o < 15\text{W}$ $V_i = 12.5\text{V}$ to 25V	9.5	10	10.5	V
Line regulation	ΔV_o	$T_j=25^\circ\text{C}, V_i = 12.5\text{V}$ to 25V		10	200	mV
		$T_j=25^\circ\text{C}, V_i = 13\text{V}$ to 20V		3	100	mV
Load regulation	ΔV_o	$T_j=25^\circ\text{C}, I_o = 5.0\text{mA}$ to 1.5A		12	200	mV
		$T_j=25^\circ\text{C}, I_o = 250\text{mA}$ to 750mA		4	100	mV
Quiescent current	I_Q	$T_j=25^\circ\text{C}$		5.0	8	mA
Quiescent current change	ΔI_Q	$I_o = 5\text{mA}$ to 1.0A			0.5	mA
		$V_i = 13\text{V}$ to 29V			0.8	mA
Output voltage drift	$\Delta V_o/\Delta T$	$I_o = 5\text{mA}$		-1		$\text{mV}/^\circ\text{C}$
Output noise voltage	V_N	$f = 10\text{Hz}$ to $100\text{kHz}, T_a = 25^\circ\text{C}$		58		μV
Ripple rejection	RR	$f = 120\text{Hz}, V_i = 14\text{V}$ to 24V	56	71		dB
Dropout voltage	V_o	$I_o = 1.0\text{A}, T_j = 25^\circ\text{C}$		2		V
Output resistance	R_o	$f = 1\text{kHz}$		17		$\text{m}\Omega$
Short circuit current	I_{SC}	$V_i = 35\text{V}, T_a = 25^\circ\text{C}$		250		mA
peak current	I_{pk}	$T_j = 25^\circ\text{C}$		2.2		A

X7812 ELECTRICAL CHARACTERISTICS(Refer to test circuits, $0 < T_j < 125^\circ\text{C}$, $I_o = 500\text{mA}$, $V_i = 16\text{V}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	V_o	$T_j=25^\circ\text{C}$	11.5	12.0	12.5	V
		$5.0\text{mA} < I_o < 1.0\text{A}, P_o < 15\text{W}$ $V_i = 14.5\text{V}$ to 27V	11.4	12	12.6	V
Line regulation	ΔV_o	$T_j=25^\circ\text{C}, V_i = 14.5\text{V}$ to 30V		10	240	mV
		$T_j=25^\circ\text{C}, V_i = 16\text{V}$ to 22V		3	120	mV
Load regulation	ΔV_o	$T_j=25^\circ\text{C}, I_o = 5.0\text{mA}$ to 1.5A		11	240	mV
		$T_j=25^\circ\text{C}, I_o = 250\text{mA}$ to 750mA		5.0	120	mV
Quiescent current	I_Q	$T_j=25^\circ\text{C}$		5.1	8	mA
Quiescent current change	ΔI_Q	$I_o = 5\text{mA}$ to 1.0A			0.5	mA
		$V_i = 15\text{V}$ to 30V			0.8	mA
Output voltage drift	$\Delta V_o/\Delta T$	$I_o = 5\text{mA}$		-1		$\text{mV}/^\circ\text{C}$
Output noise voltage	V_N	$f = 10\text{Hz}$ to $100\text{kHz}, T_a = 25^\circ\text{C}$		76		μV
Ripple rejection	RR	$f = 120\text{Hz}, V_i = 15\text{V}$ to 25V	55	71		dB
Dropout voltage	V_o	$I_o = 1.0\text{A}, T_j = 25^\circ\text{C}$		2		V
Output resistance	R_o	$f = 1\text{kHz}$		18		$\text{m}\Omega$
Short circuit current	I_{SC}	$V_i = 35\text{V}, T_a = 25^\circ\text{C}$		230		mA
peak current	I_{pk}	$T_j = 25^\circ\text{C}$		2.2		A

X78XX

2009.10.11 V1.1

X78XX**LINEAR INTEGRATED CIRCUIT****X7815 ELECTRICAL CHARACTERISTICS**(Refer to test circuits, $0 < T_j < 125^\circ\text{C}$, $I_o = 500\text{mA}$, $V_i = 23\text{V}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	V_o	$T_j=25^\circ\text{C}$	14.4	15.0	15.6	V
		$5.0\text{mA} < I_o < 1.0\text{A}, P_o < 15\text{W}$ $V_i = 17.5\text{V}$ to 30V	14.25	15	15.75	V
Line regulation	ΔV_o	$T_j=25^\circ\text{C}, V_i = 17.5\text{V}$ to 30V		11	300	mV
		$T_j=25^\circ\text{C}, V_i = 20\text{V}$ to 26V		3	150	mV
Load regulation	ΔV_o	$T_j=25^\circ\text{C}, I_o = 5.0\text{mA}$ to 1.5A		12	300	mV
		$T_j=25^\circ\text{C}, I_o = 250\text{mA}$ to 750mA		4	150	mV
Quiescent current	I_Q	$T_j=25^\circ\text{C}$		5.2	8	mA
Quiescent current change	ΔI_Q	$I_o = 5\text{mA}$ to 1.0A			0.5	mA
		$V_i = 18\text{V}$ to 305V			0.8	mA
Output voltage drift	$\Delta V_o/\Delta T$	$I_o = 5\text{mA}$		-1		$\text{mV}/^\circ\text{C}$
Output noise voltage	V_N	$f = 10\text{Hz}$ to $100\text{kHz}, T_a = 25^\circ\text{C}$		90		μV
Ripple rejection	RR	$f = 120\text{Hz}, V_i = 18.5\text{V}$ to 28.5V	54	70		dB
Dropout voltage	V_o	$I_o = 1.0\text{A}, T_j = 25^\circ\text{C}$		2		V
Output resistance	R_o	$f = 1\text{kHz}$		19		$\text{m}\Omega$
Short circuit current	I_{SC}	$V_i = 35\text{V}, T_a = 25^\circ\text{C}$		250		mA
peak current	I_{pk}	$T_j = 25^\circ\text{C}$		2.2		A

X7818 ELECTRICAL CHARACTERISTICS(Refer to test circuits, $0 < T_j < 125^\circ\text{C}$, $I_o = 500\text{mA}$, $V_i = 23\text{V}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	V_o	$T_j=25^\circ\text{C}$	17.3	18.0	18.7	V
		$5.0\text{mA} < I_o < 1.0\text{A}, P_o < 15\text{W}$ $V_i = 21\text{V}$ to 33V	17.1	18	18.9	V
Line regulation	ΔV_o	$T_j=25^\circ\text{C}, V_i = 21\text{V}$ to 33V		15	360	mV
		$T_j=25^\circ\text{C}, V_i = 24\text{V}$ to 30V		5	180	mV
Load regulation	ΔV_o	$T_j=25^\circ\text{C}, I_o = 5.0\text{mA}$ to 1.5A		15	360	mV
		$T_j=25^\circ\text{C}, I_o = 250\text{mA}$ to 750mA		5.0	180	mV
Quiescent current	I_Q	$T_j=25^\circ\text{C}$		5.2	8	mA
Quiescent current change	ΔI_Q	$I_o = 5\text{mA}$ to 1.0A			0.5	mA
		$V_i = 21\text{V}$ to 32V			0.8	mA
Output voltage drift	$\Delta V_o/\Delta T$	$I_o = 5\text{mA}$		-1		$\text{mV}/^\circ\text{C}$
Output noise voltage	V_N	$f = 10\text{Hz}$ to $100\text{kHz}, T_a = 25^\circ\text{C}$		110		μV
Ripple rejection	RR	$f = 120\text{Hz}, V_i = 22\text{V}$ to 32V	53	69		dB
Dropout voltage	V_o	$I_o = 1.0\text{A}, T_j = 25^\circ\text{C}$		2		V
Output resistance	R_o	$f = 1\text{kHz}$		22		$\text{m}\Omega$
Short circuit current	I_{SC}	$V_i = 35\text{V}, T_a = 25^\circ\text{C}$		250		mA
peak current	I_{pk}	$T_j = 25^\circ\text{C}$		2.2		A

X78XX

2009.10.11 V1.1

X78XX

LINEAR INTEGRATED CIRCUIT

X7824 ELECTRICAL CHARACTERISTICS

(Refer to test circuits, $0 < T_j < 125^\circ\text{C}$, $I_o = 500\text{mA}$, $V_i = 33\text{V}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	V_o	$T_j = 25^\circ\text{C}$ $5.0\text{mA} < I_o < 1.0\text{A}, P_o < 15\text{W}$ $V_i = 27\text{V}$ to 38V	23	24	25	V
Line regulation	ΔV_o	$T_j = 25^\circ\text{C}, V_i = 27\text{V}$ to 38V		17	480	mV
		$T_j = 25^\circ\text{C}, V_i = 30\text{V}$ to 36V		6	240	mV
Load regulation	ΔV_o	$T_j = 25^\circ\text{C}, I_o = 5.0\text{mA}$ to 1.5A		15	480	mV
		$T_j = 25^\circ\text{C}, I_o = 250\text{mA}$ to 750mA		5.0	240	mV
Quiescent current	I_Q	$T_j = 25^\circ\text{C}$		5.2	8	mA
Quiescent current change	ΔI_Q	$I_o = 5\text{mA}$ to 1.0A			0.5	mA
		$V_i = 27\text{V}$ to 38V			0.8	mA
Output voltage drift	$\Delta V_o/\Delta T$	$I_o = 5\text{mA}$		-1.5		$\text{mV}/^\circ\text{C}$
Output noise voltage	V_N	$f = 10\text{Hz}$ to $100\text{kHz}, T_a = 25^\circ\text{C}$		160		μV
Ripple rejection	RR	$f = 120\text{Hz}, V_i = 28\text{V}$ to 38V	50	67		dB
Dropout voltage	V_o	$I_o = 1.0\text{A}, T_j = 25^\circ\text{C}$		2		V
Output resistance	R_o	$f = 1\text{kHz}$		28		$\text{m}\Omega$
Short circuit current	I_{sc}	$V_i = 35\text{V}, T_a = 25^\circ\text{C}$		230		mA
peak current	I_{pk}	$T_j = 25^\circ\text{C}$		2.2		A

TEST CIRCUITS

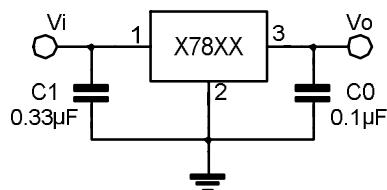


FIG.1 DC PARAMETERS

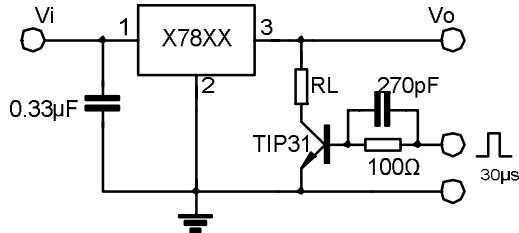


FIG.2 LOAD REGULATION

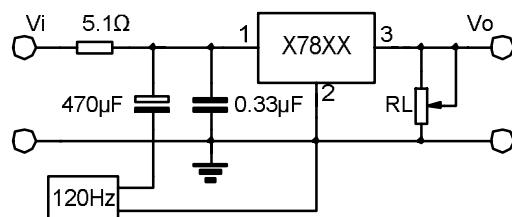


FIG.3 RIPPLE REJECTION

APPLICATION CIRCUITS

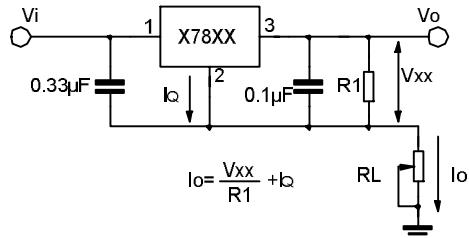
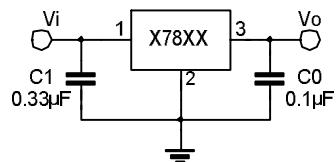


Fig.4 Fixed output regulator

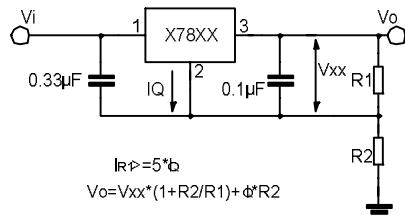


Fig.5 Constant current regulator

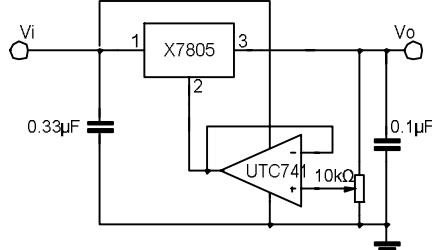


Fig.6 Circuit for increasing Regulator output voltage

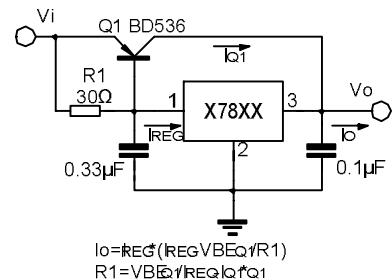


Fig.7 Adjustable output

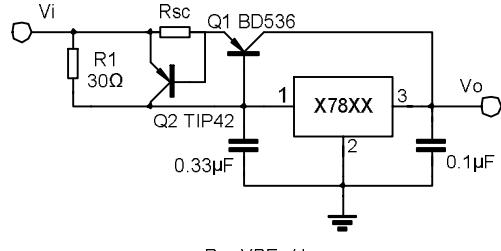


Fig.8 High current with voltage regulator

Fig.9 High output current short circuit protection

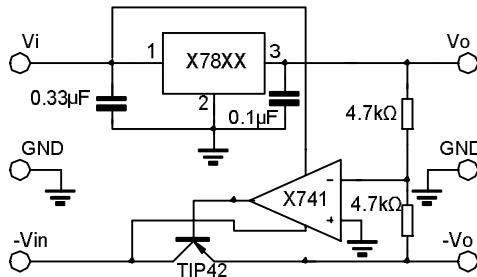


Fig.10 Tracking voltage regulator

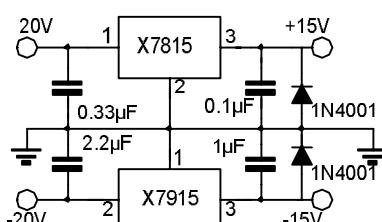


Fig.11 Split power supply(±15V,1A)

X78XX

LINEAR INTEGRATED CIRCUIT

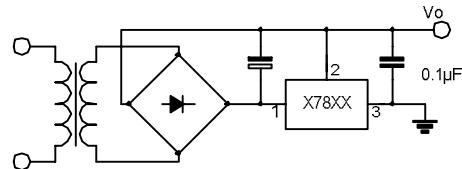


Fig.12 Negative output voltage circuit

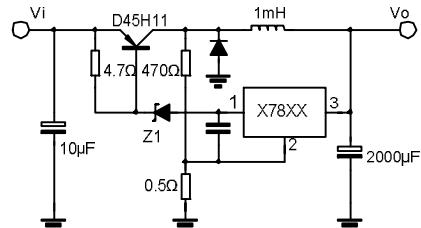


Fig.13 switching regulator

TYPICAL PERFORMANCE CHARACTERISTICS

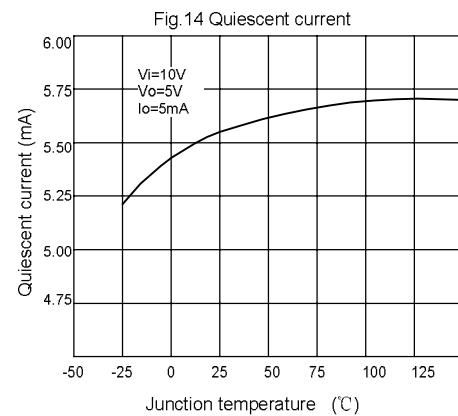


Fig.14 Quiescent current

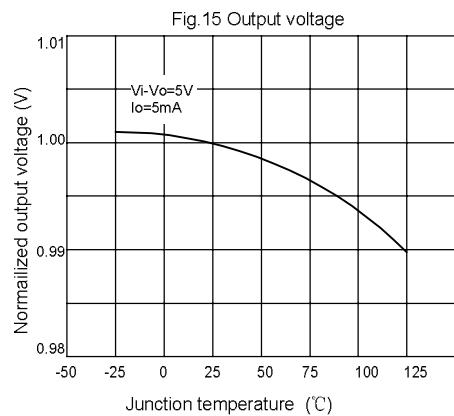


Fig.15 Output voltage

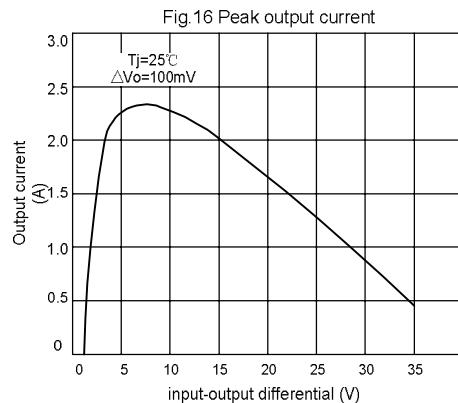


Fig.16 Peak output current


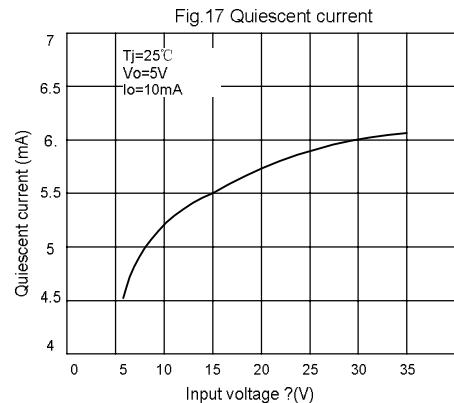


Fig.17 Quiescent current

X78XX

LINEAR INTEGRATED CIRCUIT

PACKAGE OUTLINE

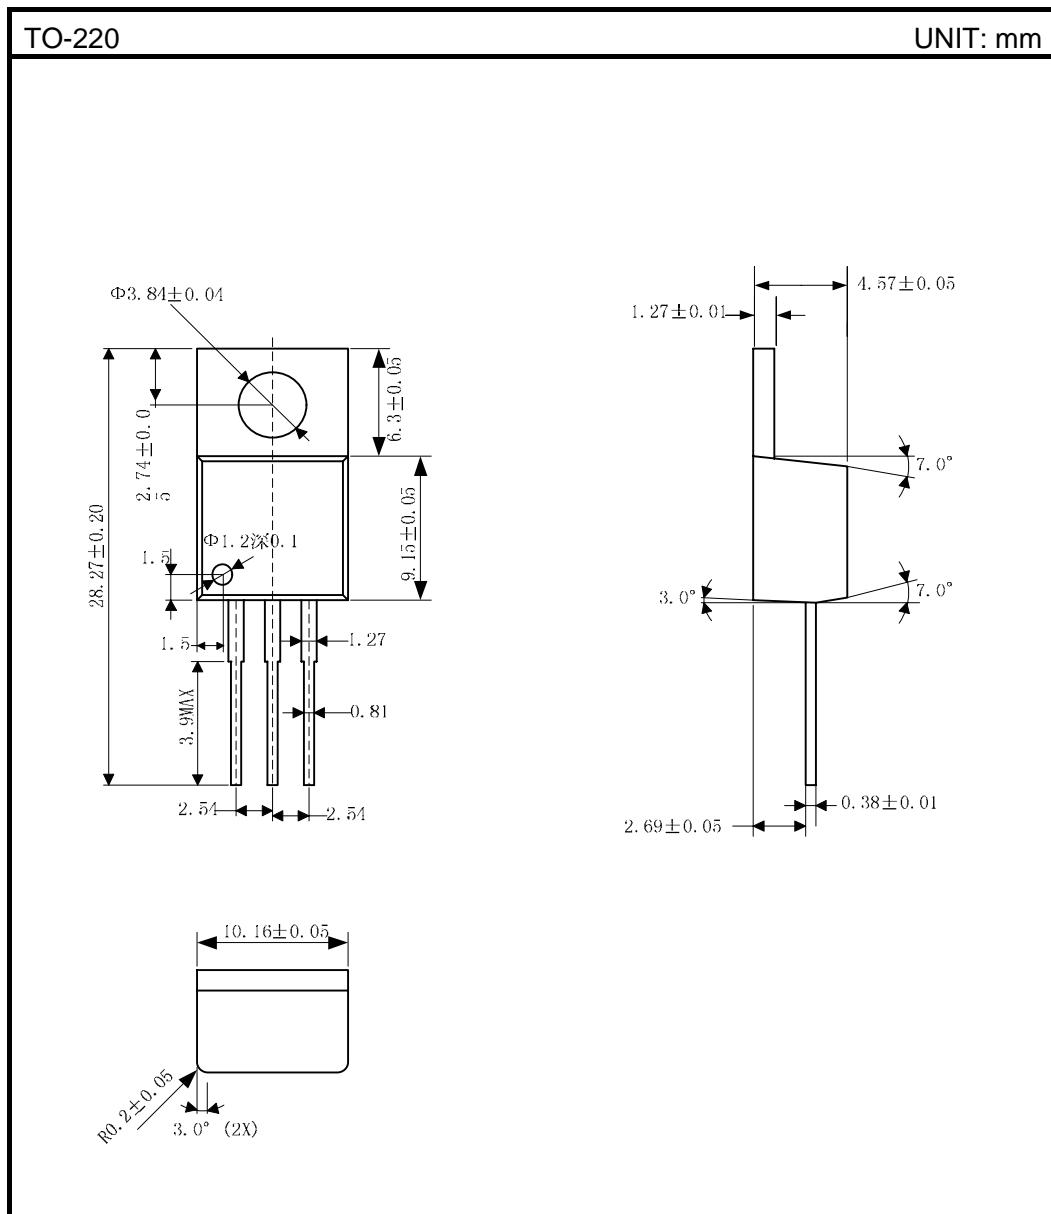

X78XX

2009.10.11 V1.1

X78XX

LINEAR INTEGRATED CIRCUIT

Attach

Revision History

Data	REV	Description	Page
	1.0	Original	
2009.10.11	1.1	Revise" 3-Dimention Outline" Add" Packge Outline TO-220"	10

X78XX