


Interfaces

for blowers with EC internal-rotor motor BG3612/3633

24 VDC

control

Gasmodul compatible

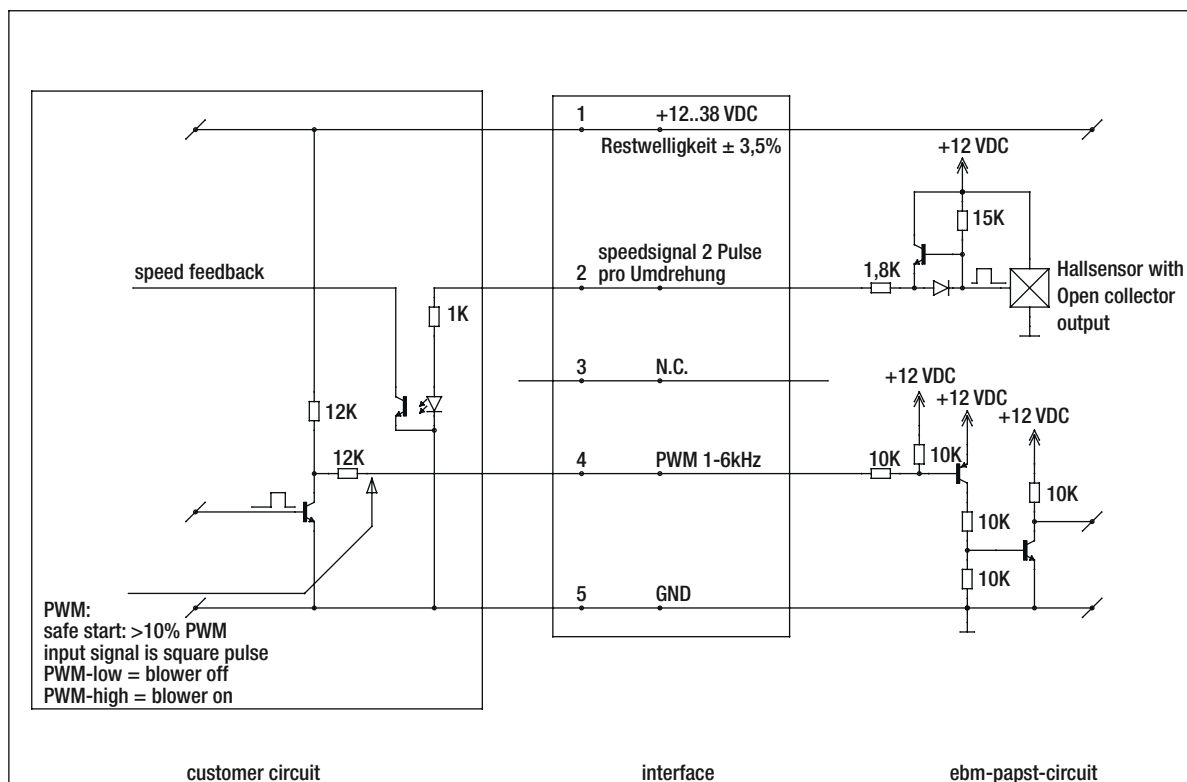


230 VAC, 50/60 Hz

120 VAC, 50/60 Hz

control


Gasmodul compatible (alternative for L&S)

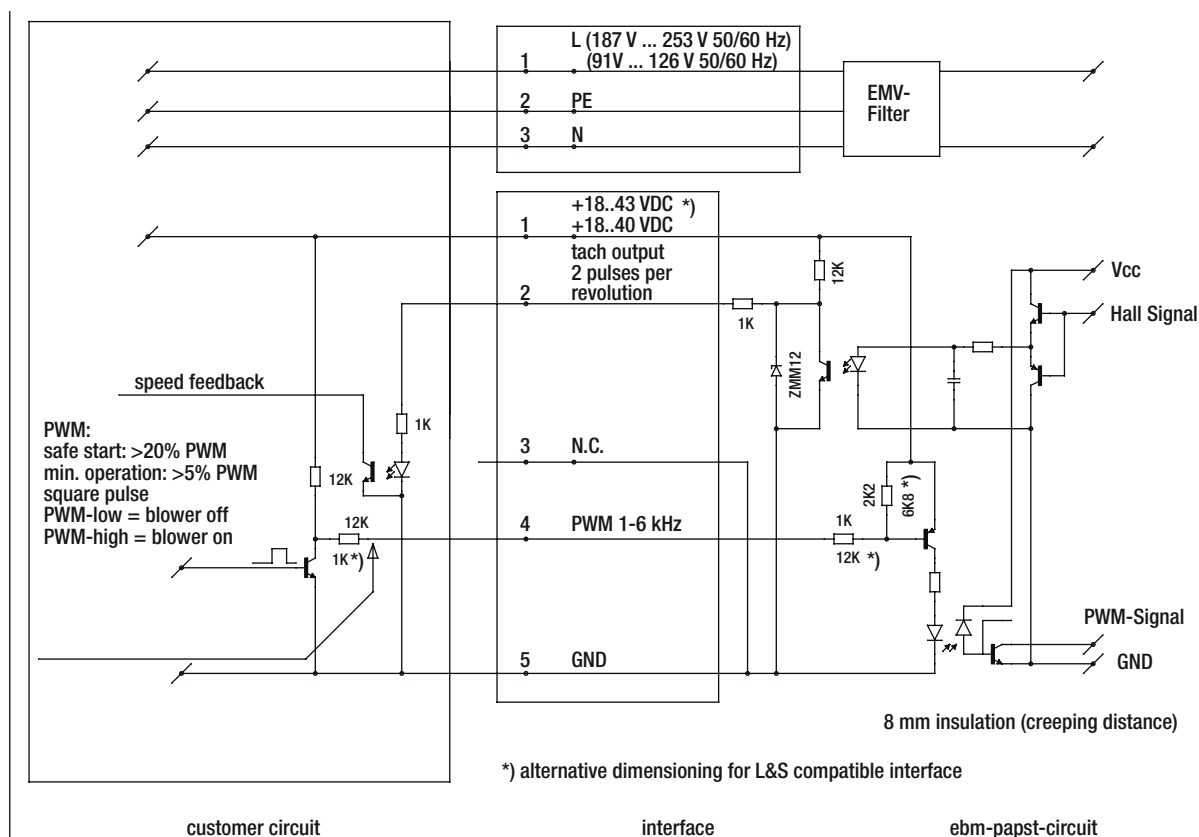

Interfaces for blowers with EC external-rotor motor


standard interface 1 – 24 VDC

valid for G1G 126 -AC13 -50 / G1G 126 -AC13 -51 / G1G 144 -AE13 -50

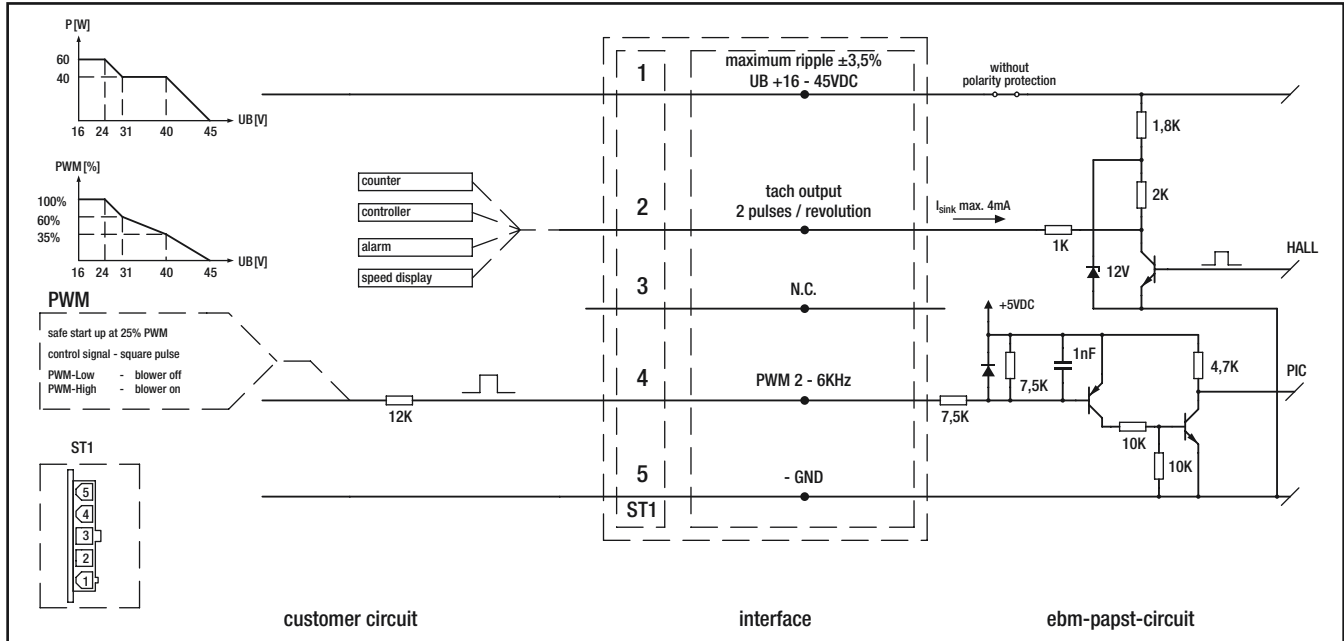

standard interface 2 – 115/230 VAC


valid for G1G 126 -AA45 -71 / G1G 126 -AA49 -71 / G1G 126 -AA45 -74 / G1G 126 -AA49 -74 / G1G 144 -AF45 -01 / G1G 144 -AF49 -01

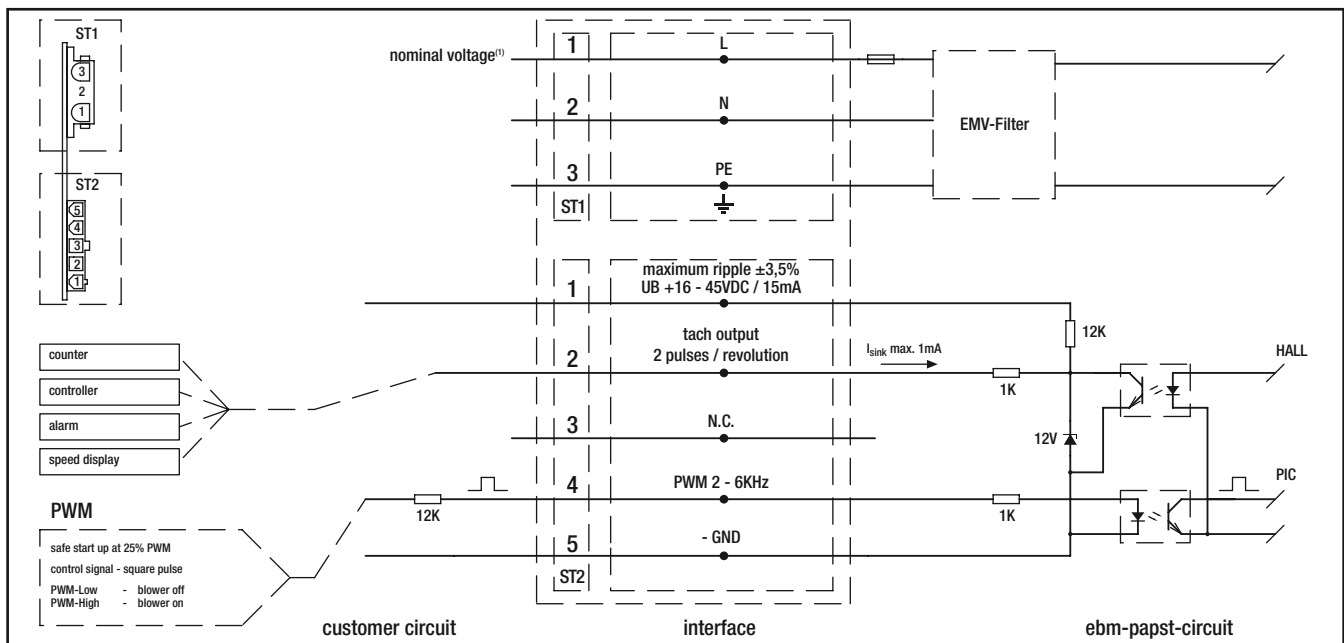

Interfaces for blowers with EC external-rotor motor

standard interface 3 – 115/230 VAC & Landis+Staeefa interface 4 – 230 VAC

valid for G1G 160 -AB41 -01 / G1G 160 -AB41 -02 / G1G 170 -AB05 -20 / G1G 170 -AB53 -01 / G1G 170 -AB53 -03

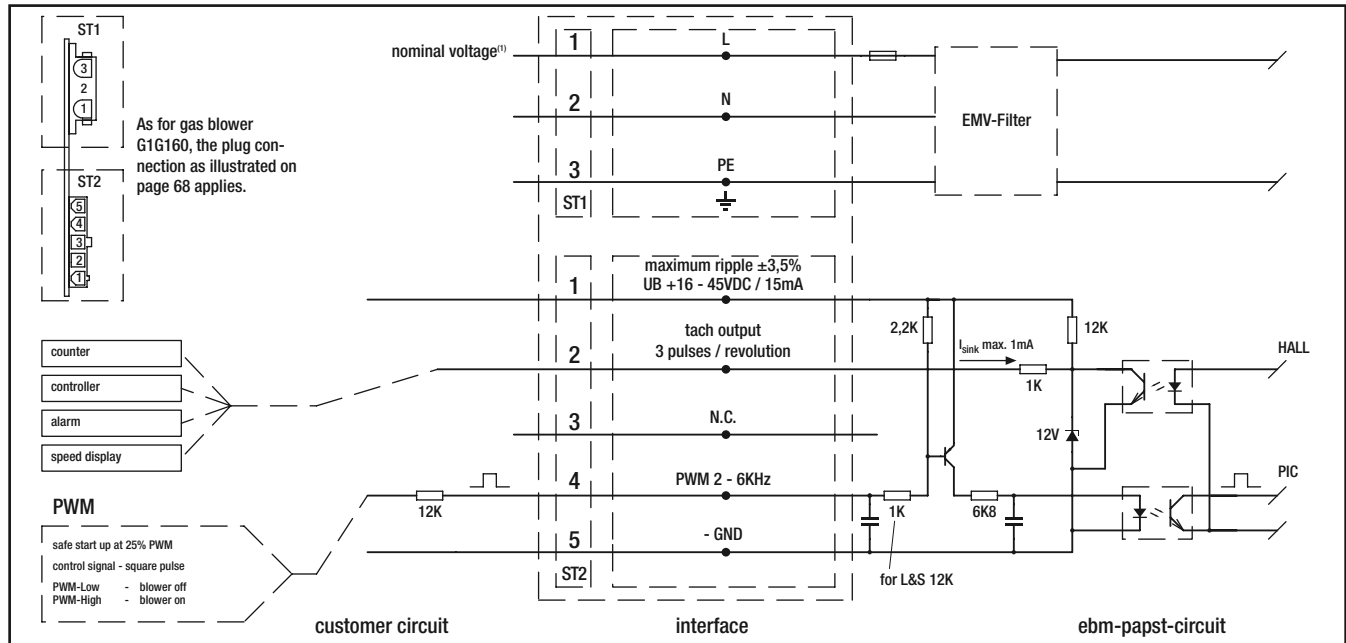

standard interface 5 – 230 VAC

valid for G3G 250 -GN04 -01

