

### Features


Epitaxial Planar Die Construction  
Complementary PNP Types Available (DDTA)  
Built-In Biasing Resistors, R1 = R2

### Mechanical Data

Case: SOT-323, Molded Plastic  
Case material - UL Flammability Rating 94V-0  
Moisture sensitivity: Level 1 per J-STD-020A  
Terminals: Solderable per MIL-STD-202, Method 208

Terminal Connections: See Diagram  
Marking: Date Code and Marking Code (See Diagrams & Page 2)  
Weight: 0.006 grams (approx.)  
Ordering Information (See Page 2)

P/N	R1, R2 (NOM)	MARKING
DDTC123EUA	2.2K	N04
DDTC143EUA	4.7K	N08
DDTC114EUA	10K	N13
DDTC124EUA	22K	N17
DDTC144EUA	47K	N20
DDTC115EUA	100K	N24

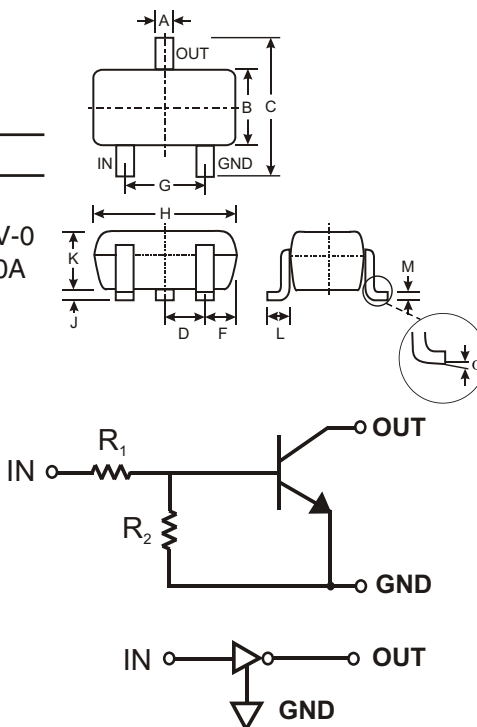

SOT-323		
Dim	Min	Max
A	0.25	0.40
B	1.15	1.35
C	2.00	2.20
D	0.65 Nominal	
E	0.30	0.40
G	1.20	1.40
H	1.80	2.20
J	0.0	0.10
K	0.90	1.00
L	0.25	0.40
M	0.10	0.18
	0	8
All Dimensions in mm		

SCHEMATIC DIAGRAM

### Maximum Ratings @ T<sub>A</sub> = 25 °C unless otherwise specified

Characteristic	Symbol	Value	Unit
Supply Voltage, (3) to (1)	V <sub>CC</sub>	50	V
Input Voltage, (2) to (1)	V <sub>IN</sub>	-10 to +12 -10 to +30 -10 to +40 -10 to +40 -10 to +40 -10 to +40	V
Output Current	I <sub>O</sub>	100 100 50 30 100 20	mA
Output Current All	I <sub>C</sub> (Max)	100	mA
Power Dissipation	P <sub>d</sub>	200	mW
Thermal Resistance, Junction to Ambient Air (Note 1)	R <sub>JA</sub>	625	C/W
Operating and Storage and Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-55 to +150	C

Note: 1. Mounted on FR4 PC Board with recommended pad layout at <http://www.diodes.com/datasheets/ap02001.pdf>.


**Electrical Characteristics** @  $T_A = 25^\circ\text{C}$  unless otherwise specified

Characteristic		Symbol	Min	Typ	Max	Unit	Test Condition
Input Voltage		$V_{I(off)}$	0.5	1.1		V	$V_{CC} = 5V, I_O = 100\text{ A}$
		$V_{I(on)}$		1.9	3		$V_O = 0.3V, I_O = 20mA$ , DDTC123EUA $V_O = 0.3V, I_O = 20mA$ , DDTC143EUA $V_O = 0.3V, I_O = 10mA$ , DDTC114EUA $V_O = 0.3V, I_O = 5mA$ , DDTC124EUA $V_O = 0.3V, I_O = 2mA$ , DDTC144EUA $V_O = 0.3V, I_O = 1mA$ , DDTC115EUA
Output Voltage		$V_{O(on)}$		0.1	0.3	V	$I_O/I_I = 10mA/0.5mA$ , DDTC123EUA $I_O/I_I = 10mA/0.5mA$ , DDTC143EUA $I_O/I_I = 10mA/0.5mA$ , DDTC114EUA $I_O/I_I = 10mA/0.5mA$ , DDTC124EUA $I_O/I_I = 10mA/0.5mA$ , DDTC144EUA $I_O/I_I = 5mA/0.25mA$ , DDTC115EUA
Input Current	DDTC123EUA DDTC143EUA DDTC114EUA DDTC124EUA DDTC144EUA DDTC115EUA	$I_I$			3.8 1.8 0.88 0.36 0.18 0.15	mA	$V_I = 5V$
Output Current		$I_{O(off)}$			0.5	A	$V_{CC} = 50V, V_I = 0V$
DC Current Gain	DDTC123EUA DDTC143EUA DDTC114EUA DDTC124EUA DDTC144EUA DDTC115EUA	$G_I$	20 20 30 56 68 82				$V_O = 5V, I_O = 20mA$ $V_O = 5V, I_O = 10mA$ $V_O = 5V, I_O = 5mA$ $V_O = 5V, I_O = 5mA$ $V_O = 5V, I_O = 5mA$ $V_O = 5V, I_O = 5mA$
Input Resistor ( $R_1$ ) Tolerance		$DR_1$	-30		+30	%	
Resistance Ratio		$R_2/R_1$	0.8	1	1.2		
Gain-Bandwidth Product*		$f_T$		250		MHz	$V_{CE} = 10V, I_E = 5mA$ , $f = 100MHz$

\* Transistor - For Reference Only

**Ordering Information** (Note 2)

Device	Packaging	Shipping
DDTC123EUA-7	SOT-323	3000/Tape & Reel
DDTC143EUA-7	SOT-323	3000/Tape & Reel
DDTC114EUA-7	SOT-323	3000/Tape & Reel
DDTC124EUA-7	SOT-323	3000/Tape & Reel
DDTC144EUA-7	SOT-323	3000/Tape & Reel
DDTC115EUA-7	SOT-323	3000/Tape & Reel

Notes: 2. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.**Marking Information**

XXX = Product Type Marking Code

See Sheet 1 Diagrams

YM = Date Code Marking

Y = Year ex: N = 2002

M = Month ex: 9 = September

Date Code Key

Year	2002	2003	2004	2005	2006	2007	2008	2009
Code	N	P	R	S	T	U	V	W

Month	Jan	Feb	March	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

# TYPICAL CURVES - DDTC143EUA

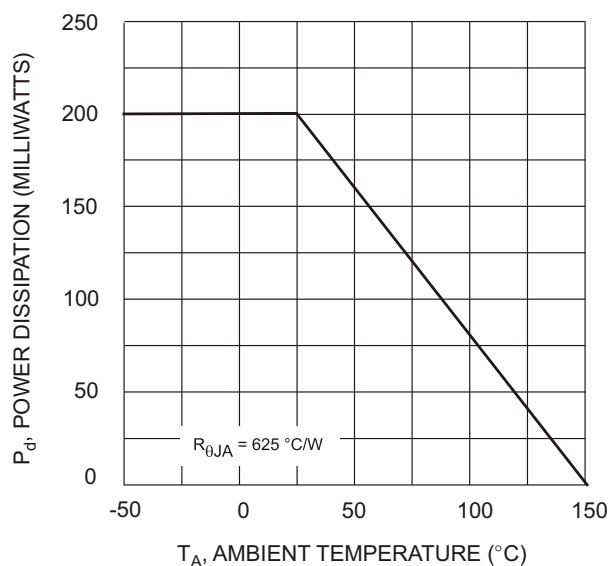


Fig. 1 Derating Curve

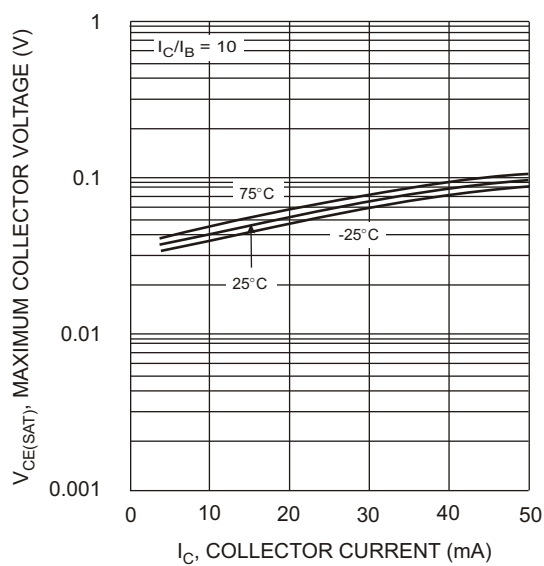


Fig. 2  $V_{CE(SAT)}$  vs.  $I_C$

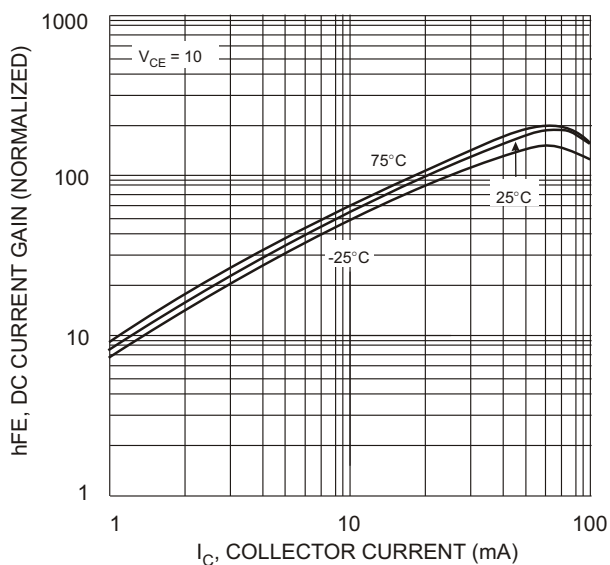


Fig. 3 DC CURRENT GAIN

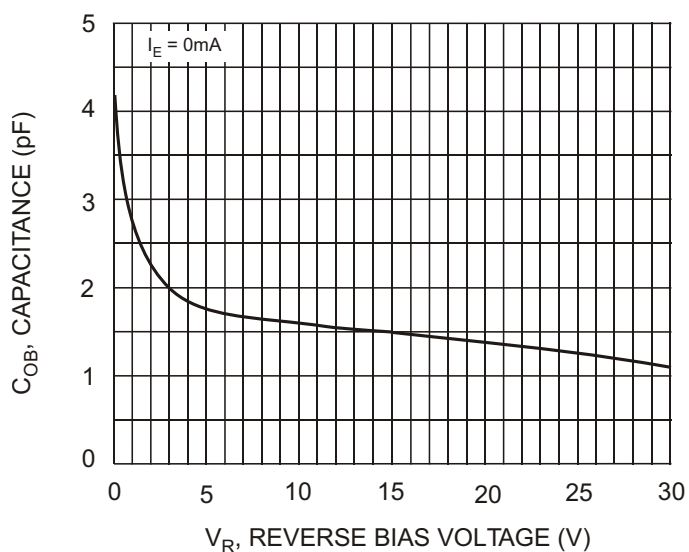


Fig. 4 Output Capacitance

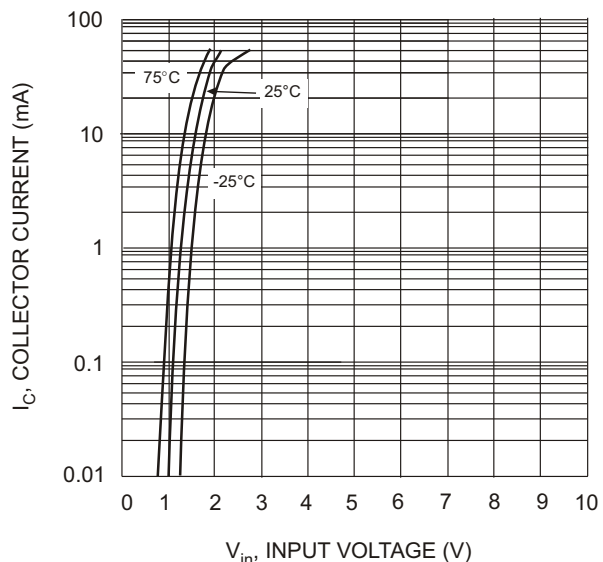


Fig. 5 Collector Current Vs. Input Voltage

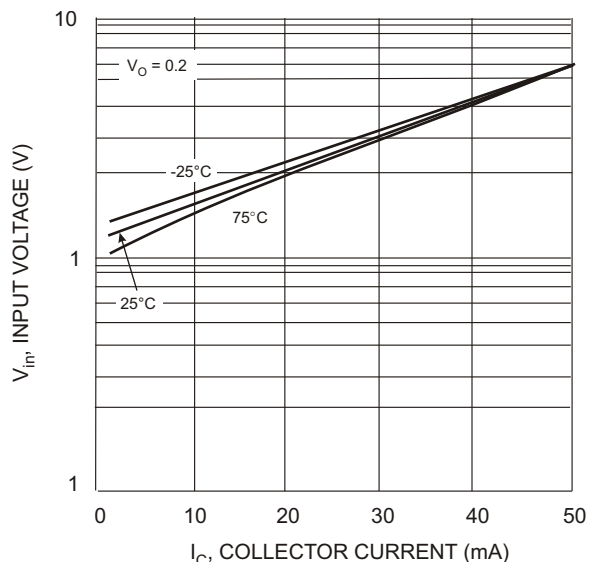


Fig. 6 Input Voltage vs. Collector Current