




SERVICE MANUAL

AE-2A CHASSIS

MODEL	COMMANDER	DEST.	CHASSIS NO.	MODEL	COMMANDER	DEST.	CHASSIS NO.
KV-A2131A	RM-831	Italian	SCC-G12D-A	KV-A2133E	RM-831	Spanish	SCC-G15E-A
KV-A2131B	RM-831	French	SCC-G13E-A	KV-A2132U	RM-831	UK	SCC-G16E-A
KV-A2131D	RM-831	AEP	SCC-G14E-A				

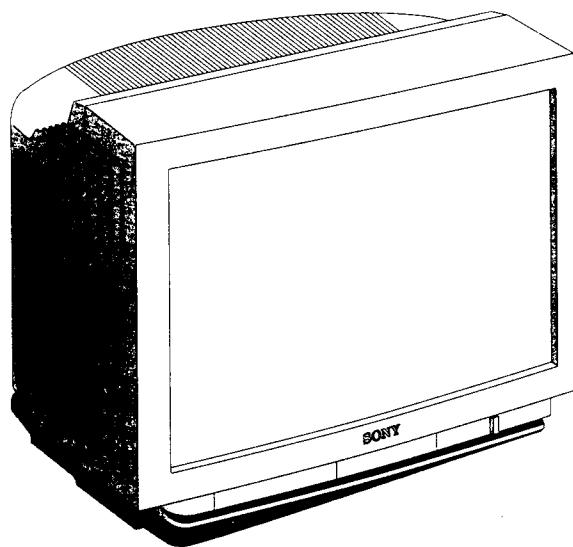

TRINITRON® COLOR TV
SONY®



ITEM MODEL	Television system	Stereo system	Channel coverage	Color system
Italian	B/G/H, D/K	GERMAN Stereo	ITALIA VHF:A-H2 (C) UHF:21-69 PAL B/G/H VHF:E2-E12 UHF:E21-E69 CABLE TV (1):S1-S41 CABLE TV (2):S01-S05, M1-M10, U1-U10 D/K VHF:R01-R12 UHF:R21-R69	PAL, SECAM NTSC4.43, NTSC3.58 (VIDEO IN)
French	B/G/H, D/K L, I	GERMAN Stereo	L VHF:F02-F10 UHF:F21-F60 CABLE:B-Q B/G/H VHF:E2-E12 UHF:E21-E69 CABLE TV (1):S1-S41 CABLE TV (2):S01-S05, M1-M10, U1-U10 ITALIA VHF:A-H2 (C) UHF:21-69 D/K VHF:R01-R12 UHF:R21-R69 I UHF:B21-B69	PAL, SECAM NTSC4.43, NTSC3.58 (VIDEO IN)
AEP	B/G/H, D/K	GERMAN Stereo	PAL B/G/H VHF:E2-E12 UHF:E21-E69 CABLE TV (1):S1-S41 CABLE TV (2):S01-S05, M1-M10, U1-U10 ITALIA VHF:A-H2 (C) UHF:21-69 D/K VHF:R01-R12 UHF:R21-R69	PAL, SECAM NTSC4.43, NTSC3.58 (VIDEO IN)
Spanish	B/G/H, D/K	GERMAN/NICAM Stereo	PAL B/G VHF:E2-E12 UHF:E21-E69 CABLE TV (1):S1-S41 CABLE TV (2):S01-S05, M1-M10, U1-U10 ITALIA VHF:A-H2 (C) UHF:21-69 D/K VHF:R01-R12 UHF:R21-R69	PAL, SECAM NTSC4.43, NTSC3.58 (VIDEO IN)
UK	I	NICAM Stereo	UHF : B21-B69	PAL SECAM, NTSC 4.43 NTSC 3.58 (VIDEO IN)

MODEL	Italian	French	AEP	Spanish	UK
Power consumption	87 W	139Wh	98 Wh	99 Wh	122 W

Picture tube Hi-Black Trinitron
Approx. 54.5 cm (21inches)
(Approx. 51 cm picture measured diagonally)
100° -deflection

[REAR]

- ⊖ 1 21-pin Euro connector (CENELEC standard)
- Inputs for audio and video signals
 - inputs for RGB
 - outputs of TV video and audio signals
- ⊕ 2/⊖ 2 21-pin Euro connector
 - inputs for audio and video signals
 - inputs for S video
 - outputs for audio and video signals (selectable)
- ⊕ Audio outputs (Variable) - phono jacks

[FRONT]

- ⊖ 3 Video input-phono jack
- ⊖ Audio input-phono jacks
- ⊖ 3 S video input 4-pin DIN
- ⊖ Headphone jack : Stereo minijack

Sound output 2×15 (RMS)
2×30 (Music)
Power requirement 220-240V
Dimensions Approx.606 x 440 x495 mm
Weight Approx.32kg
Supplied accessories RM-831 Remote Commander (1)
IEC designation R6 batteries (2)
Other features NICAM, FASTEXT

[RM-831]

Remote control system infrared control
Power requirements 3V dc
2 batteries IEC designation R6 (size AA)
Dimintions Approx.65×225×21mm (w/h/d)
Weight Approx.157g (Not including Batteries)

Design and specifications are subject to change without notice.