


7. SCHEMATIC DIAGRAM

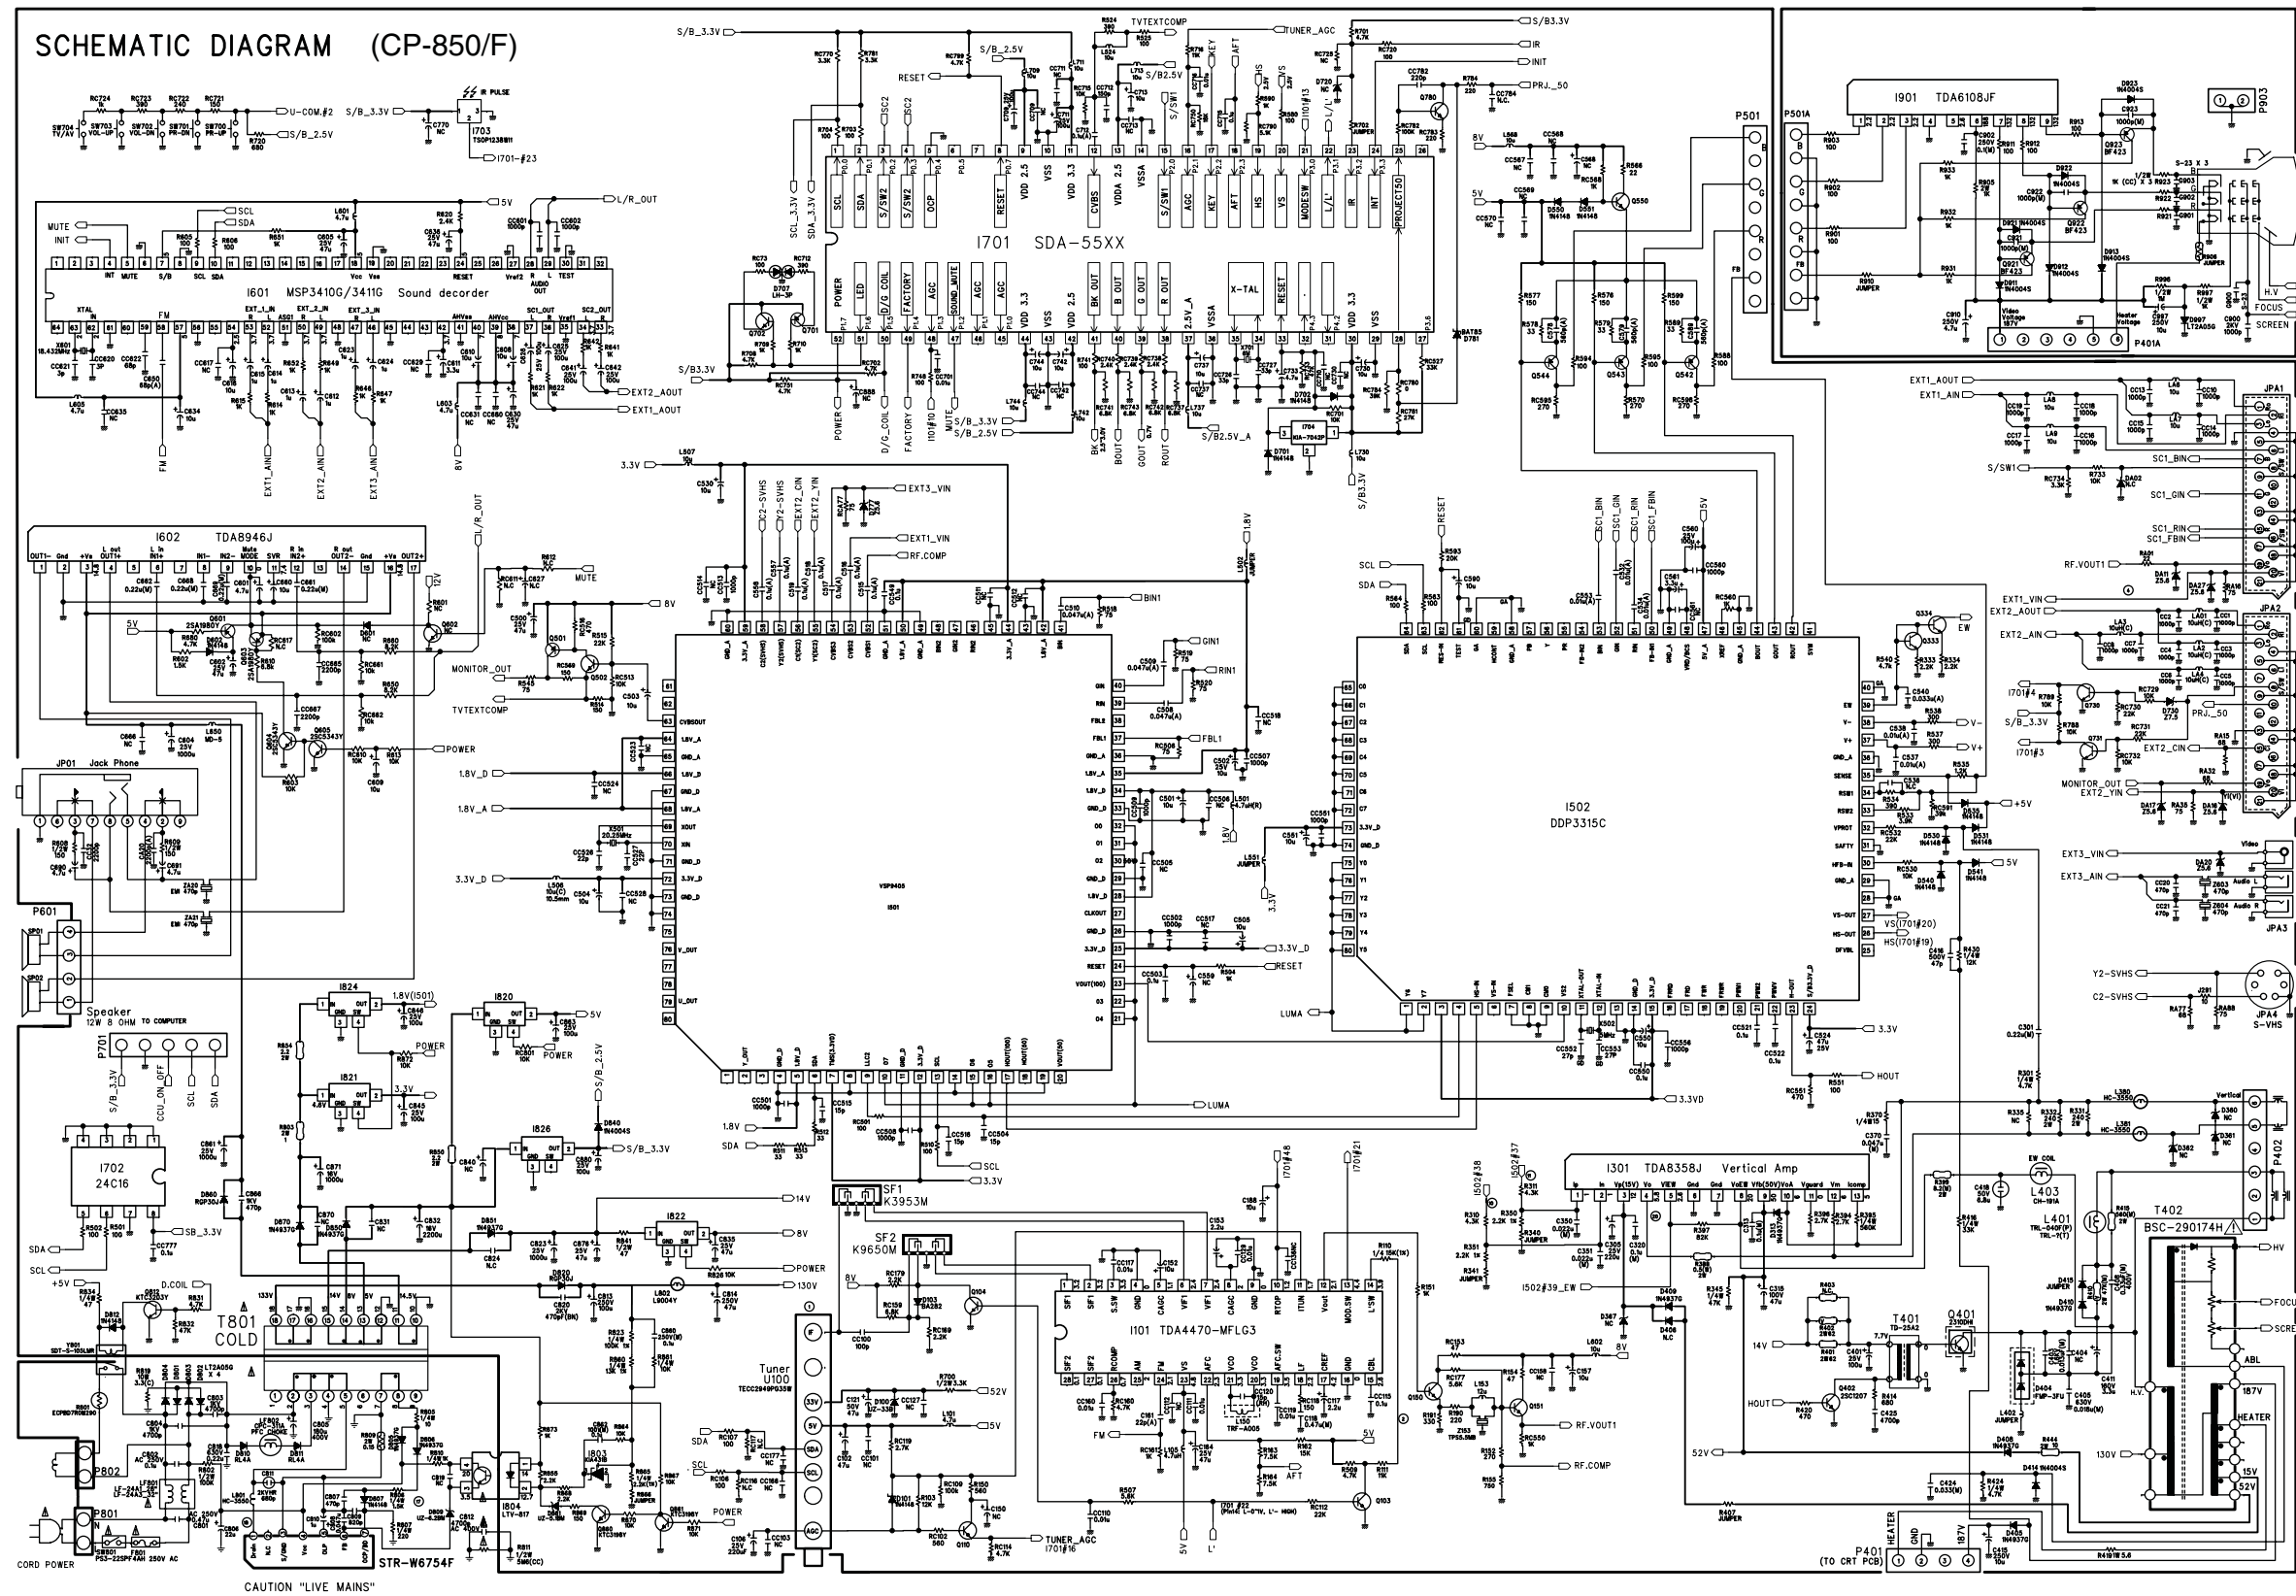

NOTE:
 1. RESISTANCE IS SHOWN IN OHM, K=1000, M=1000000
 2. UNLESS OTHERWISE NOTED IN SCHEMATIC ALL CAPACITOR VALUES ARE EXPRESSED IN uF
 3. VOLTAGES READ WITH "VTVM" FROM POINT INDICATED TO CHASSIS GROUND USING A COLOR BAR SIGNAL WITH ALL CONTROLS AT NORMAL LINE 230V AC VOLTAGE READINGS SHOWN ARE NORMAL VALUES AND MAY VARY +20% EXCEPT H.V.
 4. THIS CIRCUIT DIAGRAM IS A STANDARD ONE CIRCUIT PRINTED MAY BE SUBJECT TO CHANGE FOR PRODUCT IMPROVEMENT WITHOUT PRIOR NOTICE

WARNING:
 BEFORE RETURNING THE RECEIVER TO CUSTOMER, LEAKAGE CURRENT OR RESISTANCE MEASUREMENTS SHOULD BE PERFORMED TO DETERMINE THAT EXPOSED PARTS ARE PROPERLY INSULATED FROM THE SUPPLY CIRCUIT.

CAUTION TO SERVICE TECHNICIANS:
 BEFORE RETURNING THE RECEIVER TO CUSTOMER, LEAKAGE CURRENT OR RESISTANCE MEASUREMENTS SHOULD BE PERFORMED TO DETERMINE THAT EXPOSED PARTS ARE PROPERLY INSULATED FROM THE SUPPLY CIRCUIT.


RESISTOR	CAPACITOR	COIL
CARBON FILM	ELECTRO	PEAKING
R-WHITE	CERAMIC	CHOKE
CARBON COMP	CERAMIC CH	REED
FUSIBLE	ELECTRO MONOPOLAR	
CEMENT	MYLAR	

THE DIFFERENT PARTS FOR CRT

AGENCY	LG Philips	Thomson	Samsung
AGENCY	413	413	413
V501	AB80F7831044	AB80F7831044	AB80F7831044
C801	LA91 0.22uF	LA91 0.22uF	LA91 0.22uF
C401	LA91 0.33uF	LA91 0.33uF	LA91 0.33uF
L401	TL-50F	TL-50F	TL-50F

THE DIFFERENT PARTS FOR Virtual dolby Surround

LOC.	a/v VDS model	MP2410	MP2410
801	MP2410	MP2410	MP2410
C801	50V X7R 4700PF	50V X7R 4700PF	50V X7R 4700PF
C802	50V X7R 4700PF	50V X7R 4700PF	50V X7R 4700PF
CC801	50V X7R 4700PF	50V X7R 4700PF	50V X7R 4700PF
CC802	50V X7R 4700PF	50V X7R 4700PF	50V X7R 4700PF

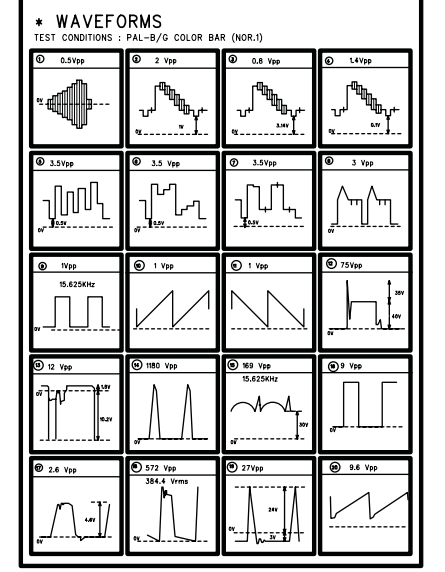

S/N : 4859813993-00
 PRODUCT SAFETY NOTICE:
 THE COMPONENTS MARKED WITH Δ ARE IMPORTANT FOR MAINTAINING THE SAFETY OF THE SET AND SHOULD BE REPLACED ONLY WITH TYPES IDENTICAL TO THOSE IN THE ORIGINAL OR SPECIFIED ONE IN THE PART LIST. DON'T DEGRADE THE SAFETY OF THE SET THROUGH IMPROPER SERVICING.