


SWITCHING REGULATOR APPLICATION.  
HIGH VOLTAGE AND HIGH SPEED  
SWITCHING APPLICATION.

### FEATURES

- Excellent Switching Times  
:  $t_{on}=1.1\mu S(\text{Max.})$ ,  $t_f=0.7\mu S(\text{Max.})$ , at  $I_C=1A$
- High Collector Voltage :  $V_{CBO}=700V$ .

### MAXIMUM RATINGS ( $T_a=25^\circ C$ )

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	$V_{CBO}$	700	V
Collector-Emitter Voltage	$V_{CEO}$	400	V
Emitter-Base Voltage	$V_{EBO}$	9	V
Collector Current	DC	$I_C$	A
	Pulse	$I_{CP}$	
Base Current	$I_B$	0.75	A
Collector Power Dissipation ( $T_c=25^\circ C$ )	$P_C$	20	W
Junction Temperature	$T_j$	150	$^\circ C$
Storage Temperature Range	$T_{stg}$	-65~150	$^\circ C$

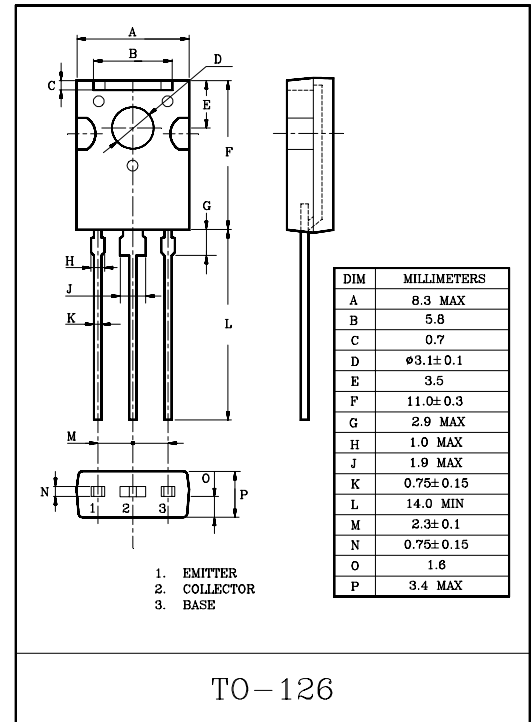


### ELECTRICAL CHARACTERISTICS ( $T_a=25^\circ C$ )


CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Emitter Cut-off Current	$I_{EBO}$	$V_{EB}=9V$ , $I_C=0$	-	-	10	$\mu A$	
DC Current Gain	$h_{FE(1)}$ Note	$V_{CE}=2V$ , $I_C=0.5A$	19	-	36		
	$h_{FE(2)}$	$V_{CE}=2V$ , $I_C=1A$	5	-	25		
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=0.5A$ , $I_B=0.1A$	-	-	0.5	V	
		$I_C=1A$ , $I_B=0.25A$	-	-	1		
		$I_C=1.5A$ , $I_B=0.5A$	-	-	3		
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C=0.5A$ , $I_B=0.1A$	-	-	1	V	
		$I_C=1A$ , $I_B=0.25A$	-	-	1.2		
Collector Output Capacitance	$C_{ob}$	$V_{CB}=10V$ , $f=0.1MHz$	-	21	-	pF	
Transition Frequency	$f_T$	$V_{CE}=10V$ , $I_C=0.1A$	4	-	-	MHz	
Turn-On Time	$t_{on}$	<p><math>I_{B1}=I_{B2}=0.2A</math> DUTY CYCLE <math>\leq 2\%</math></p>	-	-	1.1	$\mu S$	
Storage Time	$t_{stg}$		-	-	-	4.0	$\mu S$
Fall Time	$t_f$		-	-	-	0.7	$\mu S$

Note :  $h_{FE(1)}$  Classification : O:19~28 , Y:26~36


### DC CURRENT GAIN

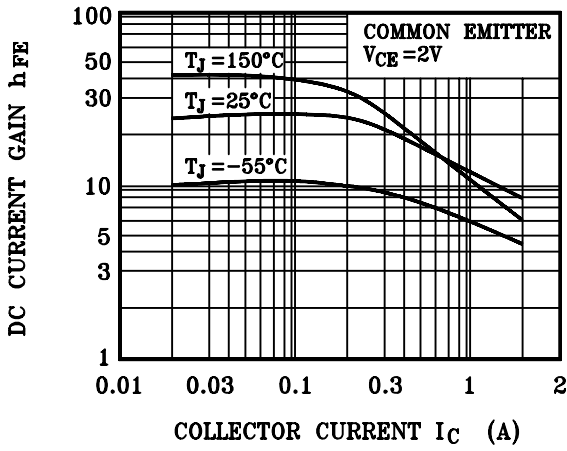


### $V_{BE(sat)} - I_C$

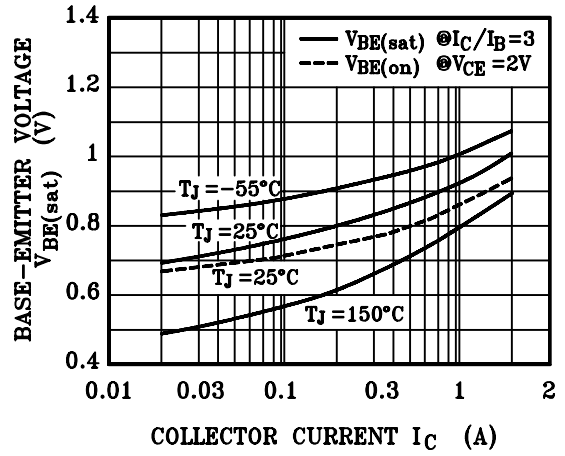


### $V_{CE(sat)} - I_C$

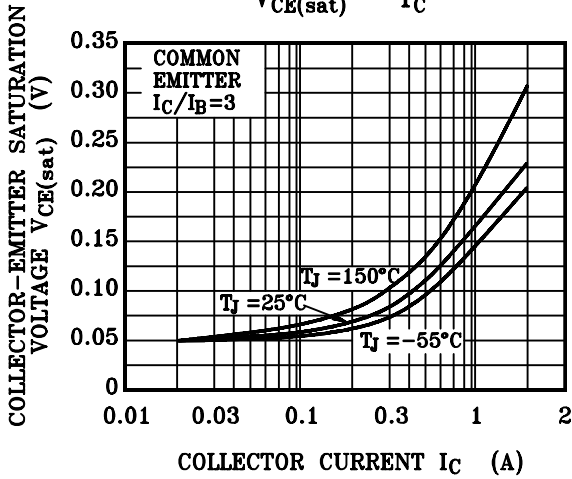


### SWITCHING CHARACTERISTIC

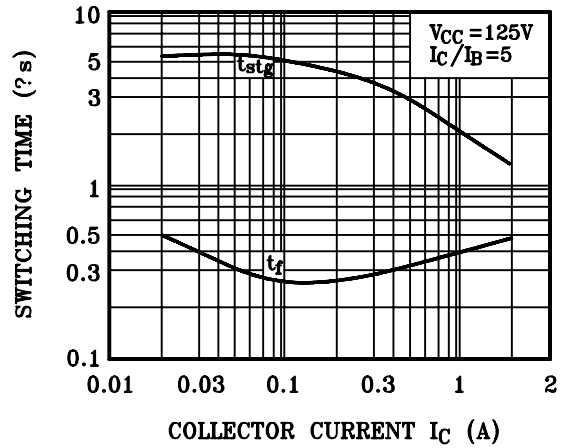

### $P_c - T_a$

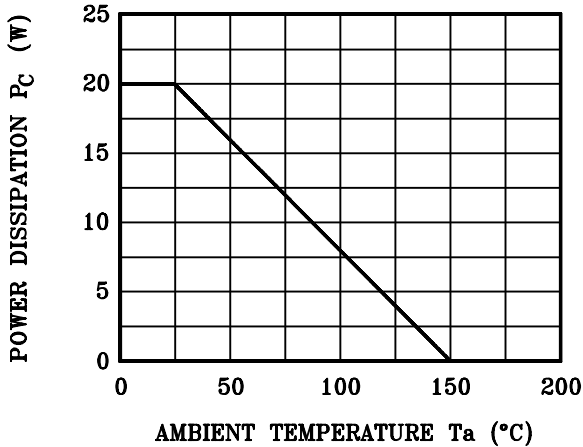

### SAFE OPERATING AREA

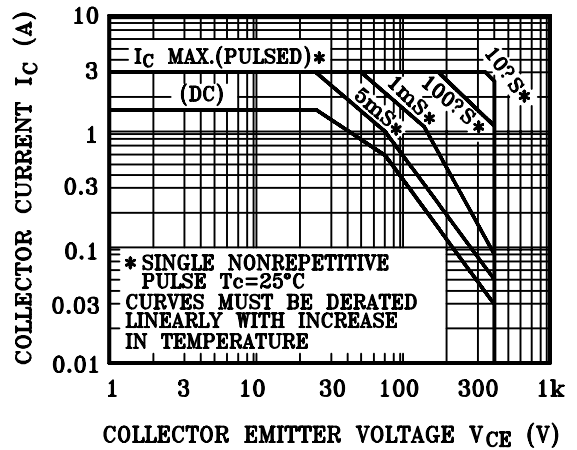

This datasheet has been downloaded from:

[www.DatasheetCatalog.com](http://www.DatasheetCatalog.com)

Datasheets for electronic components.