


Circuit diagram

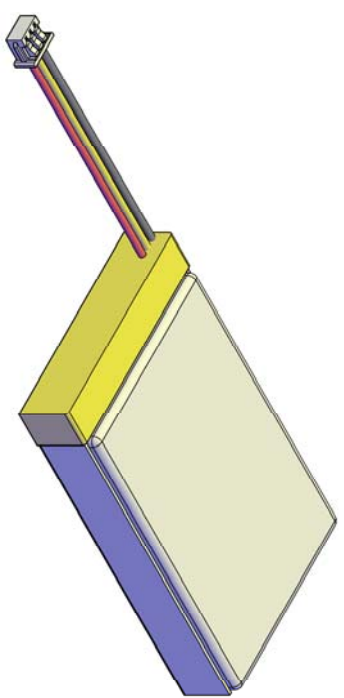

Model: LP103454		Overcharge Detection Voltage(V)	4.28±0.05
Battery pack specification (电池组规格)	Min.Capacity 最低容量 (mAh) (0.2C,25±3°C) *Single cell capacity (单体电芯容量)	Overdischarge Detection Voltage(V)	2.3±0.1
	Typical Capacity 典型容量 (mAh) (0.2C,25±3°C) *Single cell capacity (单体电芯容量)	过放保护电压 (V)	Limited to Max loading current 仅用于最大的负载电流 peak value (A) 峰值 2 (A)
	Nominal Voltage 标称电压 (V)	Customer required Max loading current 客户要求最大的负载电流 peak value (A) 峰值 2 (A)	constant (A) 持续 1 (A)
	Internal impedance 内阻 (≅) (mΩ,AC 1KHz)	Battery protection (相关的电池保护值)	
Ambient Conditions (环境温度)	Charge Temp. 充电温度 (°C)	If actual application loading current is bigger than EEMB suggested, please indicate. The application profile is important for an appropriate PCM design. (如实际应用的负载电流大于EEMB提供值, 请提出来, 实际的应用情况对PCM的设计至关重要)	
	Discharge Temp. 放电温度 (°C)	峰值 (A)	
	Humidity(湿度)	持续 (A)	

EEMB BATTERY		Drawn:	Moyongdi	Revise No.:	E4-2009
Title	LP103454-PCM-NTC-LD/	Checked 1:	Halen	Projection:	
File NO.	A04049	Checked 2:	Keyan	Page:	1/1
		Approved:		Scale:	1:1
		Draw Date:	2010/12/03	Unit:	mm

Remark(备注):  
 1. No scratch, discoloration, discoloration and leakage on the appearance of the cell(电池表面无划痕、变形、污点及漏液等现象).  
 2. Rohs compliant(严格按照ROHS要求生产).