


fast recovery diodes, 6pcs total
min. voltage rating: 600V

voltage set, 160V - 450VDC

Ferrite: RM10, material: T35
primary: 2x11 turns, d=0.8-1.2mm
secondary: 350 turns, d=0.2mm
Fet's: min. 55V / 2.5A-3A

Connect a standard ignition coil, series with
a standard 4.7 - 16uF / 400V motor starter capacitor
Discharge energy: $U_{Charge} \cdot C / 2$
Maximum allowed: 1.2 Joule

Max pulse current limit is 2.5A

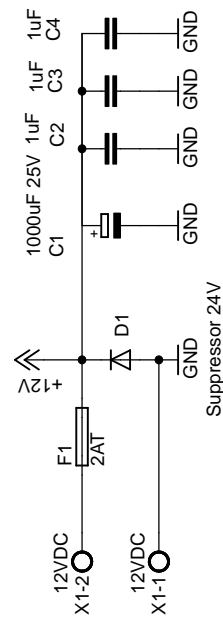

Electric fence

TITLE: villanyasztor

Document Number:

REV:

Date: 2013.05.11. 2:35:14

Sheet: 1/1